

## University of Groningen

### Power-based control of physical systems

Garcia-Canseco, Eloisa; Jeltsema, Dimitri; Ortega, Romeo; Scherpen, Jacquélien M. A.

*Published in:*  
Automatica

*DOI:*  
[10.1016/j.automatica.2009.10.012](https://doi.org/10.1016/j.automatica.2009.10.012)

**IMPORTANT NOTE:** You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

*Document Version*  
Publisher's PDF, also known as Version of record

*Publication date:*  
2010

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Garcia-Canseco, E., Jeltsema, D., Ortega, R., & Scherpen, J. M. A. (2010). Power-based control of physical systems. *Automatica*, 46(1), 127-132. <https://doi.org/10.1016/j.automatica.2009.10.012>

#### Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

#### Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

*Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.*



## Brief paper

Power-based control of physical systems<sup>☆</sup>Eloísa García-Canseco<sup>a,\*</sup>, Dimitri Jeltsema<sup>b</sup>, Romeo Ortega<sup>c</sup>, Jacquélien M.A. Scherpen<sup>d</sup><sup>a</sup> Eindhoven University of Technology, Faculty of Mechanical Engineering, CST, PO Box 513, 5600MB Eindhoven, The Netherlands<sup>b</sup> Delft Institute of Applied Mathematics, Delft University of Technology, Mekelweg 4, 2628 CD Delft, The Netherlands<sup>c</sup> Laboratoire des Signaux et Systèmes, Supélec, Plateau de Moulon, 91192, Gif-sur-Yvette, cedex, France<sup>d</sup> Faculty of Mathematics and Natural Sciences, ITM, University of Groningen, Nijenborgh 4, 9747 AG Groningen, The Netherlands

## ARTICLE INFO

## Article history:

Received 18 April 2008

Received in revised form

7 May 2009

Accepted 25 September 2009

Available online 31 October 2009

## Keywords:

Passivity-based control

Nonlinear control

Stability

Nonlinear systems

## ABSTRACT

It is well known that energy-balancing control is stymied by the presence of pervasive dissipation. To overcome this problem in electrical circuits, the alternative paradigm of *power shaping* was introduced in Ortega, Jeltsema, and Scherpen (2003) – where, as suggested by its name, stabilization is achieved shaping a function akin to the power instead of the energy function. In this paper we extend this technique to general nonlinear systems. The method relies on the solution of a PDE, which identifies the open-loop storage function. We show through some physical examples, that the power-shaping methodology yields storage functions which have units of power. To motivate the application of this control technique we illustrate the procedure with two case studies: a tunnel diode circuit and a two-tanks system.

© 2009 Elsevier Ltd. All rights reserved.

## 1. Introduction and background material

The main idea behind passivity-based control (PBC) is to modify the energy function of the system, by assigning a minimum at the desired equilibrium point. A step called energy shaping, which, combined with damping injection, constitute the two main stages of PBC (Ortega, van der Schaft, Mareels, & Maschke, 2001; van der Schaft, 2000). Among the several ways to achieve energy shaping, we can mention the controlled Lagrangian approach (Auckly, Kapitanski, & White, 2003; Bloch, Leonhard, & Marsden, 2000), the interconnection and damping assignment (IDA) (Ortega, van der Schaft, Maschke, & Escobar, 2002), the control by interconnection (van der Schaft, 2000) and the so-called *energy-balancing* PBC method (Ortega et al., 2001).

In the particular case of energy-balancing PBC, the energy function assigned to the closed-loop system is the difference between the total energy of the system and the energy supplied by the controller, hence the name energy balancing. To put our contribution in perspective, let us briefly recall the principles of

energy-balancing control (Ortega et al., 2001). Consider a system whose state space representation is given by<sup>1</sup>

$$\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}) + \mathbf{g}(\mathbf{x})\mathbf{u}, \quad (1a)$$

$$\mathbf{y} = \mathbf{h}(\mathbf{x}), \quad (1b)$$

where  $\mathbf{x} \in \mathbb{R}^n$ , and  $\mathbf{u}, \mathbf{y} \in \mathbb{R}^m$  are the input and output vectors, respectively. We assume that the system (1) satisfies a cyclo-passive inequality, that is, along all trajectories compatible with  $\mathbf{u} : [0, t] \rightarrow \mathbb{R}^m$ ,

$$H(\mathbf{x}(t)) - H(\mathbf{x}(0)) \leq \int_0^t \mathbf{u}^\top(\tau) \mathbf{y}(\tau) d\tau, \quad (2)$$

where  $H : \mathbb{R}^n \rightarrow \mathbb{R}$  is the storage function. Inequality (2) represents a universal property of physical systems, where typically,  $\mathbf{u}, \mathbf{y}$  are conjugated variables, in the sense that their product has units of power, and  $H(\mathbf{x})$  is the total stored energy in the system. Notice that no assumption of non-negativity on  $H(\mathbf{x})$  is imposed.

We recall that a system is passive if (2) holds and  $H(\mathbf{x})$  is bounded from below. Because of this additional restriction, every passive system is cyclo-passive, but the converse is not true. In terms of energy exchange, cyclo-passive systems exhibit a net

<sup>☆</sup> The material in this paper was partially presented at 3rd IFAC Workshop on Lagrangian and Hamiltonian Methods for Nonlinear Control, Nagoya, Japan 2006. This paper was recommended for publication in a revised form by Associate Editor Zongli Lin under the direction of Editor Andrew R. Teel.

\* Corresponding author. Tel.: +31 40 247 5423; fax: +31 40 246 1418.

E-mail addresses: [eloisagc@ieee.org](mailto:eloisagc@ieee.org) (E. García-Canseco), [d.jeltsema@tudelft.nl](mailto:d.jeltsema@tudelft.nl) (D. Jeltsema), [ortega@lss.supelec.fr](mailto:ortega@lss.supelec.fr) (R. Ortega), [j.m.a.scherpen@rug.nl](mailto:j.m.a.scherpen@rug.nl) (J.M.A. Scherpen).

<sup>1</sup> All vectors defined in the paper are column vectors, including the gradient of a scalar function that we denote by the operator  $\nabla = \partial/\partial\mathbf{x}$ . Differentiation of functions with scalar arguments is denoted by  $(\cdot)'$ .

absorption of energy along *closed* trajectories (Hill & Moylan, 1980), while passive systems absorb energy along *any* trajectory that starts from a state of minimal energy  $\mathbf{x}(0) = \arg \min H(\mathbf{x})$ .

Usually, the point where the storage function has a minimum is not the operating point of interest, and we would rather stabilize another admissible equilibrium point  $\mathbf{x}^*$ . Thus, in energy-balancing control, we look for a control law such that the energy supplied by the controller, that we denote by  $H_a$ , can be expressed as a function of the state. Indeed, from (2) we see that for any function  $\hat{\mathbf{u}} : \mathbb{R}^n \rightarrow \mathbb{R}^m$  such that

$$-\int_0^t \hat{\mathbf{u}}^\top(\mathbf{x}(\tau)) \mathbf{h}(\mathbf{x}(\tau)) d\tau = H_a(\mathbf{x}(t)) - H_a(\mathbf{x}(0)) \quad (3)$$

for some function  $H_a : \mathbb{R}^n \rightarrow \mathbb{R}$ , the control  $\mathbf{u} = \hat{\mathbf{u}}(\mathbf{x}) + \mathbf{v}$  will ensure that the closed-loop system satisfies

$$H_d(\mathbf{x}(t)) - H_d(\mathbf{x}(0)) \leq \int_0^t \mathbf{v}^\top(\tau) \mathbf{y}(\tau) d\tau,$$

where  $H_d(\mathbf{x}) = H(\mathbf{x}) + H_a(\mathbf{x})$  is the new total energy function. If, furthermore,  $\mathbf{x}^* = \arg \min H_d(\mathbf{x})$ , then an appropriate feedback  $\hat{\mathbf{u}}(\mathbf{x})$  will ensure  $\mathbf{x}^*$  is a stable equilibrium of the closed-loop system (with the Lyapunov function being the difference between the stored and the supplied energies  $H_d(\mathbf{x})$ ).

Unfortunately, as shown in Ortega et al. (2001), energy-balancing control is stymied by the existence of pervasive dissipation—a term which refers to the existence of dissipative elements whose power does not vanish at the desired equilibrium point. In mechanical systems, where the velocities are driven to zero, pervasive dissipation is not present as the dissipated power equals the product between dissipative forces and the velocities. However, this is no longer the case for most electrical or electromechanical systems where power involves the product of voltages and currents and the latter may be nonzero for nonzero equilibria. In other words, (3) holds if and only if the PDE

$$\underbrace{\nabla H_a^\top(\mathbf{x})[\mathbf{f}(\mathbf{x}) + \mathbf{g}(\mathbf{x})\hat{\mathbf{u}}^\top(\mathbf{x})]}_{\dot{H}_a} = -\hat{\mathbf{u}}^\top(\mathbf{x})\mathbf{h}(\mathbf{x}), \quad (4)$$

can be solved for  $H_a(\mathbf{x})$ . Since the left hand side is equal to zero at  $\mathbf{x}^*$ , it is clear that the method is applicable only to systems verifying  $\hat{\mathbf{u}}^\top(\mathbf{x}^*)\mathbf{h}(\mathbf{x}^*) = 0$ .

Several control methodologies have been developed to overcome the so-called *dissipation obstacle*, such as interconnection and damping assignment passivity-based control (IDA-PBC) (Ortega et al., 2002), where the stabilization problem is accomplished by endowing the closed-loop system with a desired port-Hamiltonian structure. In Maschke, Ortega, and van der Schaft (2000), the authors derive a constructive procedure to generate new storage functions for nonzero equilibria in the presence of pervasive dissipation, by modifying the interconnection structure of the closed-loop for port-Hamiltonian systems with constant input control. Additionally, in Jeltsema, Ortega, and Scherpen (2004) an alternative definition of the energy supply for port-Hamiltonian systems when the damping is pervasive is proposed. The associated energy-balancing property is then obtained via a swap of the damping terms. In Ortega, van der Schaft, Castaños, and Astolfi (2008), some extensions of the control by interconnection methodology have been recently introduced to circumvent the dissipation obstacle.

In this paper, we concentrate on the paradigm of *power shaping*, as originally introduced in Ortega et al. (2003) to overcome the dissipation obstacle in nonlinear RLC circuits. As suggested by its name, stabilization is achieved by shaping the power instead of the energy as is done in the aforementioned methodologies. The

starting point of power shaping is a description of the circuit in the form (Brayton & Moser, 1964)

$$\mathbf{Q}(\mathbf{x})\dot{\mathbf{x}} = \nabla P(\mathbf{x}) + \mathbf{G}(\mathbf{x})\mathbf{u}, \quad (5)$$

where  $\mathbf{Q} : \mathbb{R}^n \rightarrow \mathbb{R}^{n \times n}$  is a *full rank* matrix containing the incremental inductance and capacitance matrices and  $P : \mathbb{R}^n \rightarrow \mathbb{R}$  is the circuit's *mixed-potential function*, which has units of *power*—cf. Ortega et al. (2003) for further details. A practical advantage of the Brayton–Moser equations is that they naturally describe the dynamics of the system in terms of “easily” measurable quantities, that is, the inductor currents and capacitor voltages, instead of fluxes and charges that are normally used as canonical coordinates in port-Hamiltonian systems.

We make the observation that if  $\mathbf{Q}(\mathbf{x}) + \mathbf{Q}^\top(\mathbf{x}) \leq 0$  then the system satisfies the *power balance inequality*

$$P(\mathbf{x}(t)) - P(\mathbf{x}(0)) \leq \int_0^t \mathbf{u}^\top(\tau) \tilde{\mathbf{y}}(\tau) d\tau, \quad (6)$$

with  $\tilde{\mathbf{y}} = \tilde{\mathbf{h}}(\mathbf{x}, \mathbf{u})$  and

$$\tilde{\mathbf{h}}(\mathbf{x}, \mathbf{u}) := -\mathbf{G}^\top(\mathbf{x})\mathbf{Q}^{-1}(\mathbf{x})[\nabla P(\mathbf{x}) + \mathbf{G}(\mathbf{x})\mathbf{u}]. \quad (7)$$

This property follows immediately pre-multiplying (5) by  $\tilde{\mathbf{x}}^\top$  and then integrating. The mixed-potential function is shaped with the control  $\mathbf{u} = \hat{\mathbf{u}}(\mathbf{x})$  where

$$\mathbf{G}(\mathbf{x})\hat{\mathbf{u}}(\mathbf{x}) = \nabla P_a(\mathbf{x}) \quad (8)$$

for some  $P_a : \mathbb{R}^n \rightarrow \mathbb{R}$ . This yields the closed-loop system  $\mathbf{Q}(\mathbf{x})\dot{\mathbf{x}} = \nabla P_d(\mathbf{x})$ , with total Lyapunov function  $P_d(\mathbf{x}) := P(\mathbf{x}) + P_a(\mathbf{x})$ , and the equilibrium will be stable if  $\mathbf{x}^* = \arg \min P_d(\mathbf{x})$ .

Two key observations are, first, that the resulting controller is *power-balancing*, in the sense that the power function assigned to the closed-loop system is the difference between the total power of the system and the power supplied by the controller. Indeed, from (7) and (8) we have that

$$\dot{P}_a = -\hat{\mathbf{u}}^\top(\mathbf{x})\tilde{\mathbf{h}}(\mathbf{x}, \hat{\mathbf{u}}(\mathbf{x})) \quad (9)$$

which, upon integration, establishes the claimed property. Second, in contrast with energy-balancing control, power-balancing is applicable to systems with pervasive dissipation. As opposed to (4), the right hand side of (9) is – because of (5) – zero at the equilibrium, therefore, this equation may be solvable even if  $\hat{\mathbf{u}}^\top(\mathbf{x}^*)\mathbf{h}(\mathbf{x}^*) \neq 0$ .

As indicated above, instrumental for the application of power-shaping is the description of the system in the form (5). Our main contribution is to make the procedure applicable to nonlinear systems described by (1). To this end, we apply Poincaré lemma,<sup>2</sup> which we quote below, to derive necessary and sufficient conditions to achieve this transformation. We prove in this way that the power-shaping problem boils down to the solution of two linear homogeneous PDEs. Despite the intrinsic difficulty of solving PDEs, we show through some physical examples, that the power-shaping procedure yields storage functions which have units of power.

**Lemma 1 (Poincaré Lemma).** Given  $\mathbf{K} : \mathbb{R}^n \rightarrow \mathbb{R}^n$ ,  $\mathbf{K} \in \mathcal{C}^1$ . There exists  $P : \mathbb{R}^n \rightarrow \mathbb{R}$  such that  $\nabla P(\mathbf{x}) = \mathbf{K}(\mathbf{x})$  in a neighborhood of  $\mathbf{x} = \mathbf{x}^*$  if and only if  $\nabla \mathbf{K}(\mathbf{x}) = (\nabla \mathbf{K}(\mathbf{x}))^\top$ , where

$$\nabla \mathbf{K} = \begin{bmatrix} \frac{\partial K_1}{\partial x_1} & \cdots & \frac{\partial K_1}{\partial x_n} \\ \vdots & \ddots & \vdots \\ \frac{\partial K_n}{\partial x_1} & \cdots & \frac{\partial K_n}{\partial x_n} \end{bmatrix}.$$

<sup>2</sup> We refer the reader to Spivak (1990) for the Poincaré lemma in the differential form language, and to the recent work Yap (2009) for an inductive development using partial differential equations.

## 2. Power-shaping control of nonlinear systems

The main contribution of this paper is contained in the following proposition.

**Proposition 1.** Consider the general nonlinear system (1). Given an equilibrium point  $\mathbf{x}^* \in X^* \subset \mathbb{R}^n$ , where  $X^* := \{\tilde{\mathbf{x}} \in \mathbb{R}^n \mid \mathbf{g}^\perp(\tilde{\mathbf{x}}) \mathbf{f}(\tilde{\mathbf{x}}) = \mathbf{0}\}$ , and  $\mathbf{g}^\perp(\mathbf{x})$  is a full-rank left annihilator of  $\mathbf{g}(\mathbf{x})$ .<sup>3</sup> Assume

A.1 There exists a nonsingular matrix  $\mathbf{Q} : \mathbb{R}^n \rightarrow \mathbb{R}^{n \times n}$  that

(i) solves the partial differential equation

$$\nabla(\mathbf{Q}(\mathbf{x})\mathbf{f}(\mathbf{x})) = [\nabla(\mathbf{Q}(\mathbf{x})\mathbf{f}(\mathbf{x}))]^\top, \quad (10)$$

(ii) and verifies  $\mathbf{Q}(\mathbf{x}) + \mathbf{Q}^\top(\mathbf{x}) \leq 0$  in a neighborhood of  $\mathbf{x}^*$ .

A.2 There exists a scalar function  $P_d : \mathbb{R}^n \rightarrow \mathbb{R}$ , (locally) positive definite in a neighborhood of  $\mathbf{x}^*$ , that verifies

(iii)  $\mathbf{g}^\perp(\mathbf{x})\mathbf{Q}^\top(\mathbf{x})\nabla P_d(\mathbf{x}) = \mathbf{0}$ ,

(iv)  $\nabla P_d(\mathbf{x}^*) = \mathbf{0}$ ,  $\nabla^2 P_d(\mathbf{x}^*) > 0$ , with

$$P_d(\mathbf{x}) := P(\mathbf{x}) + P_a(\mathbf{x}), \quad (11)$$

and  $P(\mathbf{x})$  satisfies  $\nabla P(\mathbf{x}) = \mathbf{Q}(\mathbf{x})\mathbf{f}(\mathbf{x})$ .

Then, the control law

$$\mathbf{u} = [\mathbf{g}^\top(\mathbf{x})\mathbf{Q}^\top(\mathbf{x})\mathbf{Q}(\mathbf{x})\mathbf{g}(\mathbf{x})]^{-1} \mathbf{g}^\top(\mathbf{x})\mathbf{Q}^\top(\mathbf{x})\nabla P_d(\mathbf{x}) \quad (12)$$

ensures  $\mathbf{x}^*$  is a (locally) stable equilibrium with Lyapunov function  $P_d(\mathbf{x})$ . Assume, in addition,

A.3  $\mathbf{x}^*$  is an isolated minimum of  $P_d(\mathbf{x})$  and the largest invariant set contained in the set

$$\{\mathbf{x} \in \mathbb{R}^n \mid \nabla^\top P_d(\mathbf{x}) [\mathbf{Q}^{-1}(\mathbf{x}) + \mathbf{Q}^{-\top}(\mathbf{x})] \nabla P_d(\mathbf{x}) = 0\}$$

equals  $\{\mathbf{x}^*\}$ .

Then,  $\mathbf{x}^*$  is an asymptotically stable equilibrium and an estimate of its domain of attraction is given by the largest bounded level set  $\{\mathbf{x} \in \mathbb{R}^n \mid P_d(\mathbf{x}) \leq c\}$ .

**Proof.** The first part of the proof consist of showing that, under Assumption A.1, system (1) can be written in the form (5).<sup>4</sup> To this end, invoking Poincaré lemma, we have that (10) is equivalent to the existence of  $P : \mathbb{R}^n \rightarrow \mathbb{R}$  such that

$$\mathbf{Q}\mathbf{f} = \nabla P. \quad (13)$$

Substituting (1) in the above equation and taking into account the full-rank property of  $\mathbf{Q}$  in A.1, we get (5) with  $\mathbf{G} := \mathbf{Q}\mathbf{g}$ . To prove the stability claim, we proceed as follows. Define  $\mathbf{G}^\perp := \mathbf{g}^\perp \mathbf{Q}^{-1}$ , i.e., a full-rank left annihilator of  $\mathbf{G}$ , and the full-rank matrix

$$\begin{bmatrix} \mathbf{G}^\perp \\ \mathbf{G}^\top \end{bmatrix}. \quad (14)$$

Left-multiplying Eq. (5) by (14) yields

$$\begin{bmatrix} \mathbf{G}^\perp \\ \mathbf{G}^\top \end{bmatrix} \mathbf{Q}\dot{\mathbf{x}} = \begin{bmatrix} \mathbf{G}^\perp \nabla P \\ \mathbf{G}^\top \nabla P + \mathbf{G}^\top \mathbf{G}\mathbf{u} \end{bmatrix}. \quad (15)$$

Noticing from (11) that  $P = P_d - P_a$ , Eq. (15) becomes


$$\begin{bmatrix} \mathbf{G}^\perp \\ \mathbf{G}^\top \end{bmatrix} \mathbf{Q}\dot{\mathbf{x}} = \begin{bmatrix} \mathbf{G}^\perp (\nabla P_d - \nabla P_a) \\ \mathbf{G}^\top (\nabla P_d - \nabla P_a) + \mathbf{G}^\top \mathbf{G}\mathbf{u} \end{bmatrix}.$$

Now, substituting the control action (12) and (iii) of A.2, we finally get the closed-loop dynamics  $\mathbf{Q}\dot{\mathbf{x}} = \nabla P_d$ . Condition iv) of A.2 clearly implies that  $\mathbf{x}^*$  is a local minimum point of  $P_d(\mathbf{x})$ . Taking the time derivative of  $P_d$  along the closed-loop dynamics, we have  $\dot{P}_d = \frac{1}{2}\dot{\mathbf{x}}^\top(\mathbf{Q} + \mathbf{Q}^\top)\dot{\mathbf{x}}$ . Because of (ii) of Assumption A.1,  $\dot{P}_d \leq 0$  and  $P_d$  qualifies as a Lyapunov function. From the closed-loop equation we have  $\dot{\mathbf{x}} = \mathbf{Q}^{-1}(\mathbf{x})\nabla P_d$ , hence  $P_d$  can be rewritten as

$$\dot{P}_d = \frac{1}{2} \nabla^\top P_d \mathbf{Q}^{-\top}(\mathbf{x}) (\mathbf{Q} + \mathbf{Q}^\top) \mathbf{Q}^{-1} \nabla P_d. \quad (16)$$

<sup>3</sup> That is,  $\mathbf{g}^\perp(\mathbf{x})\mathbf{g}(\mathbf{x}) = \mathbf{0}$ , and  $\text{rank}(\mathbf{g}^\perp(\mathbf{x})) = n - m$ .

<sup>4</sup> To simplify the expressions, the arguments of all functions will be omitted.

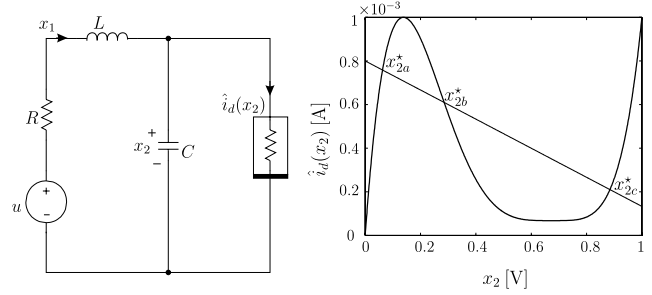

**Fig. 1.** Tunnel diode circuit and tunnel diode characteristic  $\hat{i}_d(x_2)$  with the equilibrium points.

Asymptotic stability follows immediately, with Assumption A.3 and invoking LaSalle's invariance principle. This completes the proof.  $\square$

**Remark 1.** Assumption A.1 of Proposition 1 involves the solution of the PDE (10) subject to the sign constraint (ii)—which may be difficult to satisfy. In Ortega et al. (2003), a constructive procedure is proposed, starting from a pair  $\{\mathbf{Q}, P\}$  describing the dynamics (5), explicitly generate alternative pairs  $\{\tilde{\mathbf{Q}}, \tilde{P}\}$  that also describe the dynamics, i.e.,  $\tilde{\mathbf{Q}}(\mathbf{x})\dot{\mathbf{x}} = \nabla \tilde{P}(\mathbf{x}) + \tilde{\mathbf{G}}(\mathbf{x})\mathbf{u}$ , where  $\tilde{\mathbf{G}}(\mathbf{x}) = \tilde{\mathbf{Q}}(\mathbf{x})\mathbf{g}(\mathbf{x})$ .

**Remark 2.** Clearly, the power-shaping stage of the procedure – after transforming (1) into the form (5) – coincides with the one proposed in Ortega et al. (2002) for energy-shaping using interconnection and damping assignment passivity-based control (IDA-PBC). Additional remarks on the relation between these techniques may be found in Blankenstein (2005); Jeltsema et al. (2004) and in the recent work by Ortega et al. (2008). Indeed, for port-Hamiltonian (pH) systems (van der Schaft, 2000)

$$\dot{\mathbf{x}} = [\mathbf{J}(\mathbf{x}) - \mathbf{R}(\mathbf{x})]\nabla H(\mathbf{x}) + \mathbf{g}(\mathbf{x})\mathbf{u},$$

$$\mathbf{y} = \mathbf{g}^\top(\mathbf{x})\nabla H(\mathbf{x}),$$

with full-rank matrix  $\mathbf{J}(\mathbf{x}) - \mathbf{R}(\mathbf{x})$ , a trivial solution of (10) is obtained by setting  $\mathbf{Q}(\mathbf{x}) = [\mathbf{J}(\mathbf{x}) - \mathbf{R}(\mathbf{x})]^{-1}$ . However, in such a case the associated potential function is not modified and remains the total stored energy instead of the power as is desired.

### 3. Case study I: The tunnel diode

In García-Canseco, Ortega, Scherpen, and Jeltsema (2007), we have applied the power-shaping methodology to stabilize the tunnel diode circuit (Khalil, 1996). The resulting control law is a simple linear (partial) state feedback controller that ensures (robust) global asymptotic stability of the desired equilibrium point. For the sake of illustration we sketch here the main result of García-Canseco et al. (2007).

Consider the circuit depicted in Fig. 1, which represents the approximate behavior of a tunnel diode (Khalil, 1996). The dynamics of the circuit is given by

$$\dot{x}_1 = -\frac{R}{L}x_1 - \frac{1}{L}x_2 + \frac{u}{L}, \quad (17a)$$

$$\dot{x}_2 = \frac{1}{C}x_1 - \frac{1}{C}\hat{i}_d(x_2), \quad (17b)$$

where  $x_1$  is the current through the inductor  $L$  and  $x_2$  the voltage across the capacitor  $C$ . The function  $\hat{i}_d : \mathbb{R} \rightarrow \mathbb{R}$  represents the characteristic curve of the tunnel diode depicted in Fig. 1. The assignable equilibrium points of the circuit are determined by  $x_1^* = \hat{i}_d(x_2^*)$ , with the corresponding constant control  $u^* = R\hat{i}_d(x_2^*) + x_2^*$ .

**Proposition 2** (García-Canseco et al., 2007). Consider the dynamic equations of the tunnel diode circuit (17). Assume:

A.4  $\min_{x_2} \hat{i}_d'(x_2) > -\frac{RC}{L}$ .

Then, the power-shaping procedure of [Proposition 1](#) yields the linear (partial) state feedback control

$$u = -k(x_2 - x_2^*) + u^*, \quad (18)$$

which globally asymptotically stabilizes the equilibrium point  $\mathbf{x}^*$  with Lyapunov function

$$P_d(\mathbf{x}) = \int_0^{x_2} \hat{i}_d(\tau) d\tau + \frac{L}{2RC} (x_1 - \hat{i}_d(x_2))^2 + \frac{k}{2R} (x_2 - x_2^*)^2 + \frac{1}{2R} (x_2 - u^*)^2, \quad (19)$$

provided  $k$  satisfies

$$k > -[1 + R\hat{i}'_d(x_2^*)] > 0. \quad (20)$$

**Proof (Sketch).** It can be shown that a solution matrix  $\mathbf{Q}(\mathbf{x})$  to the PDE (10) is given by

$$\mathbf{Q}(x_2) = \begin{bmatrix} 0 & \frac{L}{R} \\ -\frac{L}{R} & -C - \frac{L}{R}\hat{i}'_d(x_2) \end{bmatrix}, \quad (21)$$

which is invertible for all  $x_2$  and, under Assumption A.4,<sup>5</sup> verifies  $\mathbf{Q} + \mathbf{Q}^\top \leq 0$  for all  $x_2$ .

Condition (iii) of [Proposition 1](#) becomes  $\frac{\partial P_a}{\partial x_1} = 0$ , indicating that  $P_a$  cannot be a function of  $x_1$ . Hence, we fix  $P_a = \Psi(x_2)$ , where  $\Psi : \mathbb{R} \rightarrow \mathbb{R}$  is an arbitrary differentiable function that must be chosen so that  $P_d(\mathbf{x}) = P(\mathbf{x}) + P_a(x_2)$  has a minimum at  $\mathbf{x}^*$ . To obtain  $P_d(\mathbf{x})$  from (11) we need to compute  $P(\mathbf{x})$  from  $\nabla P(\mathbf{x}) = \mathbf{Q}(\mathbf{x})\mathbf{f}(\mathbf{x})$ . By virtue of the gradient vector field pre-supposed by Poincaré Lemma, the path of integration is free and we get  $P_d(\mathbf{x})$  as

$$P_d(\mathbf{x}) = \int_0^{x_2} \hat{i}_d(\tau) d\tau + \frac{L}{2RC} (x_1 - \hat{i}_d(x_2))^2 + \frac{1}{2R} x_2^2 + \Psi(x_2), \quad (22)$$

where we have used  $\hat{i}_d(0) = 0$ . Notice that the above equation has indeed units of power. By choosing the simple quadratic function

$$\Psi(x_2) = \frac{k}{2R} (x_2 - x_2^*)^2 - \frac{x_2 u^*}{R},$$

we have that condition (iv) of Assumption A.2 is satisfied provided (20) holds. Thus, the resulting Lyapunov function  $P_d(\mathbf{x})$  is given, after completing the square, by (19).  $P_d(\mathbf{x})$  has a global minimum at  $\mathbf{x}^*$ . From (12) we obtain the simple linear state feedback (18). This completes the proof.  $\square$

**Remark 3.** The simplicity of the controller (18), which results from the effective exploitation of the physical structure of the system, should be contrasted with the daunting complexity of the “solution” proposed in [Rodriguez and Boyd \(2005\)](#), or the design based on linear approximations [Khalil \(1996\)](#). This linear controller should be also compared with the control law obtained by following the IDA-PBC methodology ([Ortega et al., 2002](#)), since the application of IDA-PBC without a priori knowledge of the Lyapunov function  $P_d$  is not evident.

#### 4. Case study II: Two-tank system

Consider the two-tank system depicted in [Fig. 2](#). Using Torricelli's law, the dynamics of the system can be written as ([Johnsen & Allgower, 2006](#))




Fig. 2. Two-tank system.

$$\dot{x}_1 = -\frac{a_1 \sqrt{2gx_1}}{A_1} + \frac{a_2 \sqrt{2gx_2}}{A_1} + \frac{\gamma}{A_1} u \quad (23a)$$

$$\dot{x}_2 = -\frac{a_2 \sqrt{2gx_2}}{A_2} + \frac{1-\gamma}{A_2} u, \quad (23b)$$

where the state variables  $x_1 > 0$  and  $x_2 > 0$  represent the water level in the lower and upper tank, respectively. The system parameters are all positive constants, where  $g$  is the gravitational constant and,  $A_i$  and  $a_i$ , with  $i = 1, 2$ , are the cross sections of the tanks and the outlet holes, respectively. The valve parameter is the constant  $\gamma \in [0, 1]$ , with  $\gamma = 0$  if the valve is fully open, i.e., all the water is directed to the upper tank, and  $\gamma = 1$  if the valve is closed.

For  $\gamma \in [0, 1)$ , the assignable equilibrium points of the system are restricted to the line  $x_1^* = (a_2^2 x_2^*) / (a_1^2 (\gamma - 1)^2)$ , with the corresponding constant control  $u^* = (a_2 \sqrt{2gx_2^*}) / (1 - \gamma)$ . For  $\gamma = 1$ , the equilibrium points are  $x_2^* = 0$ ,  $u^* = a_1 \sqrt{2gx_1^*}$ . The control objective is to stabilize a given equilibrium point  $\mathbf{x}^* = [x_1^* \ x_2^*]^\top$ .

Following the power-shaping procedure outlined in Section 1, we have the following result for  $\gamma \in [0, 1)$ .

**Proposition 3.** Consider the two-tank system (23) in a closed-loop with the linear state feedback controller

$$u = -k_1(x_1 - x_1^*) - k_2(x_2 - x_2^*) + u^*. \quad (24)$$

If the tuning parameters  $k_1$  and  $k_2$  satisfy

$$k_1 > 0, \quad k_2 > \frac{(1-\gamma)A_2}{4A_1} k_1, \quad (25)$$

then for all  $\gamma \in [0, 1)$ ,  $\mathbf{x}^*$  is a globally asymptotically stable equilibrium of the closed-loop system with the Lyapunov function

$$P_d(\mathbf{x}) = \frac{2a_1 k_1 \sqrt{2g}}{3A_1} x_1^{\frac{3}{2}} + \frac{2a_2 k_2 \sqrt{2g}}{3(1-\gamma)A_1} x_2^{\frac{3}{2}} + \frac{1}{2A_1} [k_1(x_1 - x_1^*) + k_2(x_2 - x_2^*)]^2 - \frac{u^*}{A_1} [k_1(x_1 - x_1^*) + k_2(x_2 - x_2^*)]. \quad (26)$$

**Proof.** Fixing the matrix  $\mathbf{Q}$  constant, i.e.,  $\mathbf{Q} = \{q_{ij}\}$ , with  $i, j = 1, 2$ , a solution to the PDE (10) yields  $q_{12} = \frac{A_2 q_{11}}{A_1}$ ,  $q_{21} = 0$ , with  $q_{11} \neq 0$  and  $q_{22} \neq 0$  free parameters. Hence,  $\mathbf{Q}$  is invertible. Moreover,  $\mathbf{Q}$  verifies  $\mathbf{Q} + \mathbf{Q}^\top < 0$  if and only if  $q_{11} < 0$  and  $q_{22} < \frac{A_2^2 q_{11}}{4A_1^2}$ . To simplify the computations, let  $q_{11} = -k_1$ ,  $q_{22} = -\frac{A_2 k_2}{A_1(1-\gamma)}$ , where  $k_1$  and  $k_2$  are positive constants.

The resulting function  $P(\mathbf{x})$ ,

$$P(\mathbf{x}) = \frac{2a_1 k_1 \sqrt{2g}}{3A_1} x_1^{\frac{3}{2}} + \frac{2a_2 k_2 \sqrt{2g}}{3(1-\gamma)A_1} x_2^{\frac{3}{2}}, \quad (27)$$

<sup>5</sup> Assumption A.4 is made for simplicity and can be easily replaced by the knowledge of a lower bound on  $\hat{i}'_d(x_2)$ . We notice that Assumption A.4 coincides with the constraint given in [Moser \(1960\)](#) to exclude the appearance of limit cycles in these kinds of circuits.



can be seen as a power-like function. Indeed, by Torricelli's law, we know that the terms  $\sqrt{2gx_1}$  and  $\sqrt{2gx_2}$  have the units of velocity, hence we define  $v_1 := \sqrt{2gx_1}$  and  $v_2 := \sqrt{2gx_2}$ .

If we fix the units of  $k_1$  and  $k_2$  to  $\text{kg/s}^2$  so that the terms  $k_1x_1 := f_1$  and  $k_2x_2 := f_2$  have units of force, and defining the unitless constants  $\beta_1 = \frac{2a_1}{3A_1}$ ,  $\beta_2 = \frac{2a_2}{3(1-\gamma)A_2}$ , the mixed-potential function (27) can be recast into

$$P(\cdot) = \beta_1 f_1 v_1 + \beta_2 f_2 v_2,$$

which clearly exhibits the products force  $\times$  velocity. Furthermore, by choosing  $\mathbf{g}^\perp = [-(1-\gamma)/A_2 \quad \gamma/A_1]$ , condition (iii) of Proposition 1 becomes

$$\frac{1}{k_1} \frac{\partial P_d}{\partial x_1} - \frac{1}{k_2} \frac{\partial P_d}{\partial x_2} = 0. \quad (28)$$

The solution of (28) yields  $P_d(\mathbf{x}) = \Psi\left(\frac{k_1}{k_2}x_1 + x_2\right)$ , where  $\Psi: \mathbb{R}^2 \rightarrow \mathbb{R}$  is an arbitrary differentiable function that must be chosen so that  $P_d(\mathbf{x}) = P(\mathbf{x}) + P_d(\mathbf{x})$  has a minimum at  $\mathbf{x}^*$ . Computing  $P_d(\mathbf{x})$  from (11), we obtain  $P_d(\mathbf{x}) = \frac{2a_1k_1\sqrt{2g}}{3A_1}x_1^{\frac{3}{2}} + \frac{2a_2k_2\sqrt{2g}}{3(1-\gamma)A_2}x_2^{\frac{3}{2}} + \Psi\left(\frac{k_1}{k_2}x_1 + x_2\right)$ , which should satisfy  $\nabla P_d(\mathbf{x}^*) = 0$  and  $\nabla^2 P_d(\mathbf{x}^*) > 0$ . As in the previous example, one possibility is to select a quadratic function of the form

$$\Psi(z(x_1, x_2)) = \frac{\kappa}{2}(z - z^*)^2 + \mu(z - z^*),$$

where  $z = \frac{k_1}{k_2}x_1 + x_2$ ,  $z^* = \frac{k_1}{k_2}x_1^* + x_2^*$ ,  $\kappa > 0$ , and  $\mu$  are scalars. Some simple calculations show that the minimum is assigned, i.e.,  $\nabla P_d(\mathbf{x}^*) = 0$ , if we set  $\mu = -\frac{k_2 u^*}{A_1}$ . The Hessian  $\nabla^2 P_d$  is calculated as

$$\nabla^2 P_d = \begin{bmatrix} \frac{k_1 a_1 \sqrt{2g}}{2A_1 \sqrt{x_1}} + \frac{\kappa k_1^2}{k_2^2} & \frac{\kappa k_1}{k_2} \\ \frac{\kappa k_1}{k_2} & \frac{k_2 a_2 \sqrt{2g}}{2A_1 (1-\gamma) \sqrt{x_2}} + \kappa \end{bmatrix},$$

which is positive definite for all positive  $\mathbf{x}$  provided (25) holds.

Setting  $\kappa = \frac{k_2^2}{A_1}$  yields the Lyapunov function (26), which has a unique minimum at  $\mathbf{x}^*$ . By virtue of the negative definiteness of  $\mathbf{Q} + \mathbf{Q}^\top$ ,  $\dot{P}_d < 0$  (cf. (9)). Thus, the simple linear state feedback (24) is globally asymptotically stabilizing.  $\square$

**Remark 4.** The controller (24) was also derived using the IDA-PBC methodology in Johnsen and Allgower (2006), and using a control by interconnection approach in Ortega et al. (2008). We refer to Johnsen and Allgower (2006) for simulations and experimental results.

## 5. Concluding remarks

We have extended the power-shaping control design methodology, proposed in Ortega et al. (2003) for nonlinear RLC circuits, to general nonlinear systems. The success of the method relies on the solution of a PDE, which allows us to write the original dynamics in terms of the Brayton–Moser equations. In spite of the intrinsic difficulty of solving PDEs, we have illustrated this technique with physical examples, where the power-shaping methodology yields storage functions which have units of power.

Among the issues that remain open and are currently being explored are the solvability of the PDE (10) – subject to the sign constraint ii) of Assumption A.1 – for different kinds of nonlinear systems and other applications of power-shaping, for instance, to general electro-mechanical and mechanical systems. Recently, the power-shaping methodology has been successfully applied to

the set point regulation problem of a micro-electromechanical system (García-Canseco, Jeltsema, Scherpen, & Ortega, 2008), and in chemical systems to control the exothermic continuous stirred tank reactor (Favache & Dochain, 2009). In the spirit of Fujimoto and Sugie (2001); Viola, Ortega, Banavar, Acosta, and Astolfi (2007), we also want to explore the effects of a coordinate change in the solvability of the PDE.

## References

- Auckly, D., Kapitanski, L., & White, W. (2003). Control of nonlinear underactuated systems. *Communications on Pure Applied Mathematics*, 3, 354–369.
- Blankenstein, G. (2005). Power balancing for a new class of nonlinear systems and stabilization of RLC circuits. *International Journal of Control*, 78(3), 159–171.
- Bloch, A., Leonhard, N., & Marsden, J. (2000). Controlled Lagrangians and the stabilization of mechanical systems I: the first matching theorem. *IEEE Transactions on Automatic Control*, 45(2), 2253–2270.
- Brayton, R., & Moser, J. (1964). A theory of nonlinear networks-I. *Quarterly of Applied Mathematics*, 22, 1–33.
- Favache, A., & Dochain, D. (2009). Analysis and control of the exothermic stirred tank reactor: the power-shaping approach. In *Joint 48th IEEE conference on decision and control and 28th Chinese control conference*, Shanghai, P.R. China.
- Fujimoto, K., & Sugie, T. (2001). Canonical transformations and stabilization of generalized Hamiltonian systems. *Systems & Control Letters*, 42(3), 217–227.
- García-Canseco, E., Ortega, R., Scherpen, J., & Jeltsema, D. (2007). Power shaping control of nonlinear systems: A benchmark example. In F. Bullo, & K. Fujimoto (Eds.), *Lagrangian and Hamiltonian methods for nonlinear control 2006* (pp. 135–146). Berlin/Heidelberg: Springer.
- García-Canseco, E., Jeltsema, D., Scherpen, J., & Ortega, R. (2008). Power-based control of physical systems: two case studies. In *Proc. 17th IFAC world congress*, Seoul, Korea (pp. 2556–2562).
- Hill, D., & Moylan, P. (1980). Dissipative dynamical systems: Basic input–output and state properties. *Journal of the Franklin Institute*, 309(5), 327–357.
- Jeltsema, D., Ortega, R., & Scherpen, J. (2004). An energy-balancing perspective of interconnection and damping assignment control of nonlinear systems. *Automatica*, 40(9), 1643–1646.
- Johnsen, J., & Allgower, F. (2006). Interconnection and damping assignment passivity-based control of a four-tank system. In: *3rd IFAC workshop on Lagrangian and Hamiltonian methods in nonlinear control*, Nagoya, Japan.
- Khalil, H. (1996). *Nonlinear systems* (2nd edition). Prentice-Hall.
- Maschke, B., Ortega, R., & van der Schaft, A. (2000). Energy-based Lyapunov functions for forced Hamiltonian systems with dissipation. *IEEE Transactions on Automatic Control*, 45(8), 1498–1502.
- Moser, J. (1960). Bistable systems of differential equations with applications to tunnel diode circuits. *IBM Journal of Research and Development*, 5, 226–240.
- Ortega, R., Jeltsema, D., & Scherpen, J. (2003). Power shaping: A new paradigm for stabilization of nonlinear RLC circuits. *IEEE Transactions on Automatic Control*, 48(10), 1762–1767.
- Ortega, R., van der Schaft, A., Castaños, F., & Astolfi, A. (2008). Control by state-modulated interconnection of port-Hamiltonian systems. *IEEE Transactions on Automatic Control*, 53(11), 2527–2542.
- Ortega, R., van der Schaft, A., Mareels, I., & Maschke, B. (2001). Putting energy back in control. *IEEE Control Systems Magazine*, 21(2), 18–33.
- Ortega, R., van der Schaft, A., Maschke, B., & Escobar, G. (2002). Interconnection and damping assignment passivity-based control of port-controlled Hamiltonian systems. *Automatica*, 38(4), 585–596.
- Rodriguez, L., & Boyd, S. (2005). Piece-wise affine state feedback for piece-wise affine slab systems using convex optimization. *Systems & Control Letters*, 54, 835–853.
- Spivak, M. (1990). *A comprehensive introduction to differential geometry*. Berkeley, CA: Publish or Perish Press.
- van der Schaft, A. (2000).  *$\mathcal{L}_2$ -gain and passivity techniques in nonlinear control*. Springer-Verlag.
- Viola, G., Ortega, R., Banavar, R., Acosta, J., & Astolfi, A. (2007). Total energy shaping control of mechanical systems: simplifying the matching equations via coordinate changes. *IEEE Transactions on Automatic Control*, 52(6), 1093–1099.
- Yap, S. L. (2009). The Poincaré lemma and an elementary construction of vector potentials. *American Mathematical Monthly*, 116(3), 261–267.



**Eloísa García-Canseco** was born in Oaxaca, Mexico. She received the B.Eng. degree (with honors) in Electronical Engineering from the Technological Institute of Oaxaca, Mexico in 1999, the M.Sc. degree (with honors) from CICESE, Ensenada, Mexico in 2001, and the Docteur Ingenieur from Université de Paris Sud, Orsay, France in 2006. She was a graduate scholar visitor at the University of Twente in 2004. She has been Member of IEEE since 2000, and a student member of SIAM until 2006. From July 2006 until December 2007 she was a postdoctoral researcher at Laboratoire des Signaux et Systèmes, Gif-sur-Yvette, France. In 2008, she joined the Faculty of Mathematics and Natural Sciences at the University of Groningen as a postdoctoral fellow. Currently she is with the Control System Technology group at the Faculty of Mechanical Engineering at TU/e.

Her research interests are in the fields of nonlinear control systems, the physical modeling of dynamical systems, dissipativity-based control, haptics for automotive and medical applications, and micro combined heat and power cogeneration units.



**Dimitri Jeltsema** received the B.Eng. degree in Electrical Engineering from the Rotterdam University of Applied Science, The Netherlands, and the M.Sc. degree in Systems and Control Engineering from the University of Hertfordshire, United Kingdom in 1996 and 2000, respectively. In May 2005 he received the Ph.D. degree (with honors) from Delft University of Technology, The Netherlands. From 2005 to 2007 he was postdoctoral researcher and lecturer at the Delft Center for Systems and Control. Currently he is an assistant professor at the Optimization and Systems Theory group of the Delft Institute of Applied Mathematics.

His research interests include the modeling and control of nonlinear circuits and systems.



**Romeo Ortega** was born in Mexico. He obtained his BSc in Electrical and Mechanical Engineering from the National University of Mexico, the Master of Engineering from Polytechnical Institute of Leningrad, USSR, and the Docteur D'Etat from the Polytechnical Institute of Grenoble, France in 1974, 1978 and 1984 respectively. He then joined the National University of Mexico, where he worked until 1989. He was a Visiting Professor at the University of Illinois in 1987–88 and at the McGill University in 1991–1992, and a Fellow of the Japanese Society for the Promotion of Science in 1990–1991. He has been

a member of the French National Researcher Council (CNRS) since June 1992. Currently he is at the Laboratoire de Signaux et Systèmes (SUPELEC) in Paris. His

research interests are in the fields of nonlinear and adaptive control, with a special emphasis on applications. Dr Ortega is a Fellow Member of the IEEE. He has served as chairman in several IFAC and IEEE committees and editorial boards. Currently he chairs the Automatica Paper Prize Award Committee (2009–2012). He is an Editor at Large of the IEEE Transactions on Automatic Control, and an Associate Editor of Systems and Control Letters and International Journal of Adaptive Control and Signal Processing.



**Jacqueliën M.A. Scherpen** received her M.Sc. and Ph.D. degrees in Applied Mathematics from the University of Twente, The Netherlands, in 1990 and 1994, respectively, in the field of Systems and Control. From 1994 to 2006 she was at the Delft University of Technology, The Netherlands, with the Circuits and Systems and Control Engineering groups of Electrical Engineering. From 2003 to 2006 she was with the Delft Center for Systems and Control of the Delft University of Technology, The Netherlands. Since September 2006 she has held a Professor position at the University of Groningen in the

Industrial Technology and Management department of the faculty of Mathematics and Natural Sciences. She has held visiting research positions at the Université de Compiègne, France, SUPELEC, Gif-sur-Yvette, France, the University of Tokyo, Japan and the Old Dominion University, VA, USA. Her research interests include nonlinear model reduction methods, realization theory, nonlinear control methods, with in particular modeling and control of physical systems with applications to electrical circuits, electro-mechanical systems and mechanical systems. Industrial and space applications are included in her interests. She has been an associate editor of the IEEE Transactions on Automatic Control, and of the International Journal of Robust and Nonlinear Control. Currently, she is an associate editor of the IMA Journal of Mathematical Control and Information, and she is on the editorial board of the International Journal of Robust and Nonlinear Control.